

Industrial & Safety Supplies

orders@hardwareunlimited.ca

Phone: (403) 723-0241

www.hardwareunlimited.ca

#45, 4216 - 54th Avenue SE, Calgary AB T2C 2E3

Authorized distributor

for



KLONDIKE®

Independent Canadian Company
270 Oils and Lubricants • Locally Supplied

www.klondikelubricants.com


















SAE 10W CF SAE 40 CF-2 OW-30 CJ-4 FULL SYN OW-40 CJ-4 FULL SYN 5AE 40 LOW ASH 5W-40 CJ-4 FULL SYN 15W-40 CJ-4 FULL SYN		
15W-40 LOW ASH 5W-40 CJ-4 FULL SYN 15W-40 CJ-4 FULL SYN	Heavy Duty Engine Oils	3
OW-20 SN/GF-5 dexos1® FULL SYN 5W-20 SN/GF-5 SYN BLEND 5W-20 SN/GF-5 dexos1® FULL SYN 5W-30 SN/GF-5 SYN BLEND 5W-30 SN/GF-5 SYN BLEND		
10W-40 SN 20W-50 SN 5W-40 SN/CF EUROPEAN FULL SYN	Automotive Engine Oils	7
80W-90 GL-5 LIMITED SLIP 85W-140 GL-5 LIMITED SLIP ISO 150 EP 75W-90 GL-5 FULL SYNTHETIC LIMITED SLIP ISO 220 EP 75W-140 GL-5 FULL SYNTHETIC LIMITED SLIP ISO 320 EP 75W-140 GL-5 FULL SYNTHETIC LIMITED SLIP ISO 460 EP	Gear Lubricants	11
ISO 150 EP ISO 220 EP ISO 320 EP ISO 460 EP ISO 460 EP DEXRON® -VI / MERCON® LV ATF FULL SYN		
UNIVERSAL ATF FULL SYN HD ATF FULL SYN TDTO-4 ALL SEASON SYN BLEND TDTO-4 ARCTIC FULL SYN 30 TDTO-4 50 TDTO-4	Transmission Fluids	15
MV AW 15 MV AW 36 MV AW 22 MV AW 46 AW 32 ≥ MAX™ AW 22 SB AW 46 ZINC FREE 180 46 LONG LIFE TURBINE MAX™ AW 32 MAX™ AW 46 MAX™ AW 46 MAX™ AW 68 MAX™ AW 68	Hydraulic Fluids	19
WINTER SCOMPRESSOR 150 46 ROCK DRILL ALL SEASON 2 CYCLE FORM RELEASE WAY SUMMER TC-W3 SOLUBLE CUTTING COLL	Industrial & Functional Fluids	25
ULTRA TAC EP-00 SYN BLEND ULTRA TAC EP-0 SYN BLEND ULTRA TAC EP-1 SYN BLEND MOLY TAC EP-2 ULTRA TAC EP-2 MULTI-PURPOSE OPEN GEAR	Greases	29
-40°C WASHER FLUID		
SOLVENT		
BRAKE CLEAN	Chemicals	33

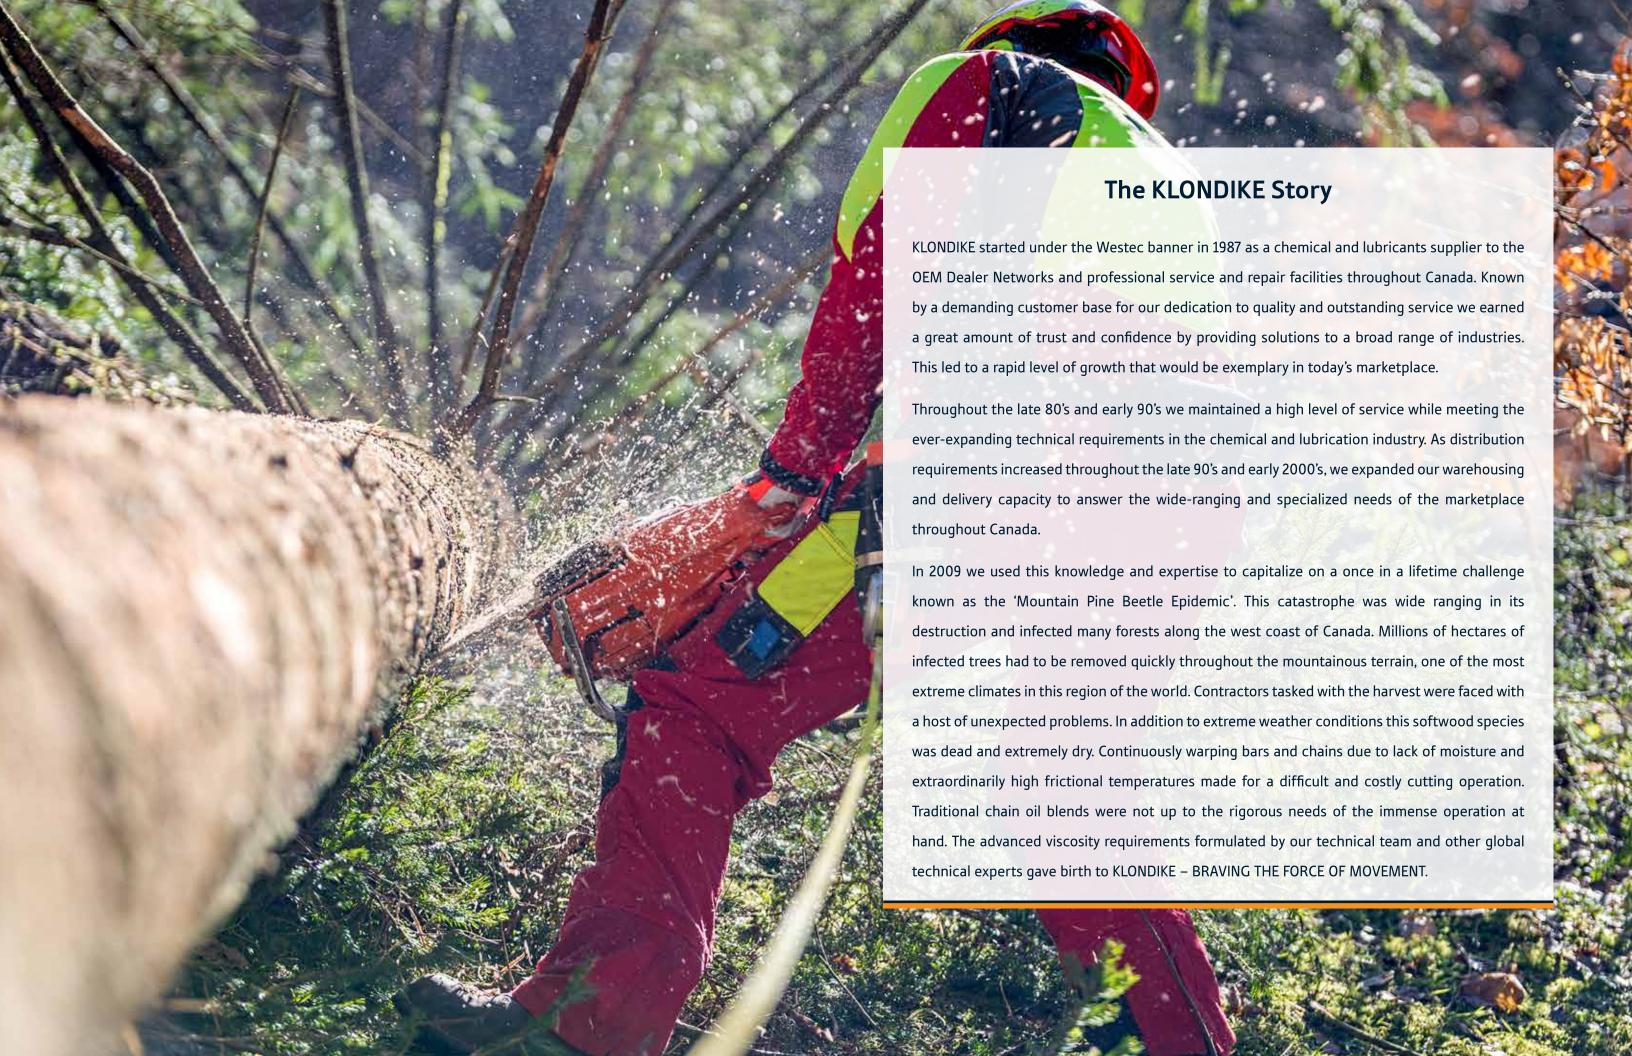

Heavy Duty Engine Oils



= Conventional



= Synthetic Blend



= Full Synthetic



Price:









recommended for use in all engines specifying API CJ-4 Service Category and SAE 10W-30.


SAE 10W-30 CJ-4 is OEM certified by Cummins, Detroit Diesel, Volvo, Mack, and Renault; and









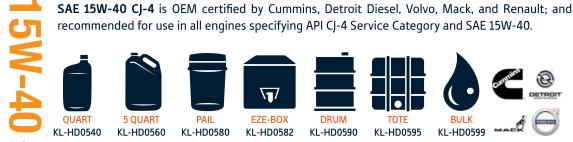





KL-HD0580



KL-HD0582



KL-HD0590

KL-HD0595











Service Categories CJ-4, CI-4 PLUS, CI-4, SN and SAE grade 0W-30.





KL-HD2080





Service Categories CJ-4, CI-4 PLUS, CI-4, SN and SAE grade 0W-40.











KL-HD2595

SAE OW-40 CJ-4 Full Synthetic is recommended for use in heavy duty engines specifying API

KL-HD2560

KL-HD2060

KL-HD2580

KL-HD2590

Price:





climatic conditions.



KLONDIKE heavy duty engine oils are formulated

to assist in maximizing engine life and minimizing

wear. While providing a protective film, heavy duty

engine oils must work to disperse soot and reduce

sludge in order to optimize engine performance.

Our advanced processes and technologies

enable KLONDIKE heavy duty motor oils to strike

a balance between durability, emission control,

and optimized drain intervals and improved

efficiencies for your equipment. Specially

engineered with Million Mile Technology, they

meet the needs of heavy duty diesel and gasoline

engines operating under all service conditions.

The exclusive KLONDIKE Arctic Performance

Technology ensures improved reliability in extreme

KLONDIKE heavy duty oils have been approved by

world's leading manufacturers, including:







HYDRAULIC FLUIDS

HEAVY DUTY ENGINE OILS

AUTOMOTIVE ENGINE OILS

GEAR LUBRICANTS

GREASES

Heavy Duty Engine Oils





KL-HD3060





KL-HD3080



KL-HD3082



SAE 5W-40 CJ-4 Full Synthetic is OEM certified by Detroit Diesel, Volvo, Mack, and Renault; and

recommended for use in all engines specifying API CJ-4 Service Category and SAE 5W-40.





KL-HD3099



Price:













KL-HD3590





KL-HD3090



SAE 15W-40 CJ-4 Full Synthetic is recommended for use in heavy duty engines specifying API CJ-4

Price:

SAE 10W CF Heavy Duty Engine Oil is recommended for use in four-stroke gasoline and diesel engines where SAE 10W monograde meeting API CF is specified.













KL-HD6080

KL-HD6095

KL-HD6099

Price:

SAE 30 CF-2 Heavy Duty Engine Oil is recommended for use in four-stroke gasoline and diesel









KL-HD6360



KL-HD6380

engines where SAE 30 monograde meeting API CF-2 is specified.



KL-HD6390



KL-HD6395

Price:

SAE 40 CF-2 Heavy Duty Engine Oil is recommended for use in four-stroke gasoline and diesel engines where SAE 40 monograde meeting API CF-2 is specified.





















KL-HD6680 KL-HD6690 KL-HD6695



Heavy Duty Engine Oils



Price:









engines where SAE 50 monograde meeting API CF-2 is specified.

SAE 50 CF-2 Heavy Duty Engine Oil is recommended for use in four-stroke gasoline and diesel

KL-HD6890 KL-HD6895

SAE 40 Low Ash is recommended for heavy duty stationary turbo-charged or naturally aspirated, stoichiometric or lean burn engines running on natural gas and requiring low ash engine oil.

AS



KL-HD7690 KL-HD7695

KL-HD7699

Automotive Engine Oils



= Conventional



= Synthetic Blend

in passenger cars, light trucks, sport utility vehicles, and other stationary or mobile engines.

SAE 20W-50 SN uses a specialized formula for older, high mileage engines. Recommended for

SAE 5W-20 SN/GF-5 Synthetic Blend is recommended for use in automobiles and other stationary

or mobile engines specifying SAE 5W-20 grade and API SN/GF-5 Service Category.



= Full Synthetic



SAE 10W-40 SN uses a specialized formula for older, high mileage engines. Recommended for use






KL-LD0540

Price:



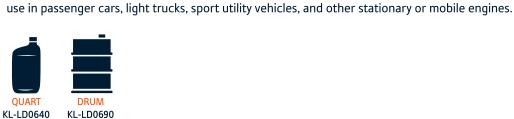



Price:











KL-LD1090

KL-LD1290

SAE 5W-30 SN/GF-5 Synthetic Blend is recommended for use in automobiles and other stationary



KL-LD1095

KL-LD1295

Price:



or mobile engines specifying SAE 5W-30 grade and API SN/GF-5 Service Category.



KL-LD1240

5 OUAR

KL-LD1260

KL-LD1060

PAII

KL-LD1280




KL-LD1282





Price:

8

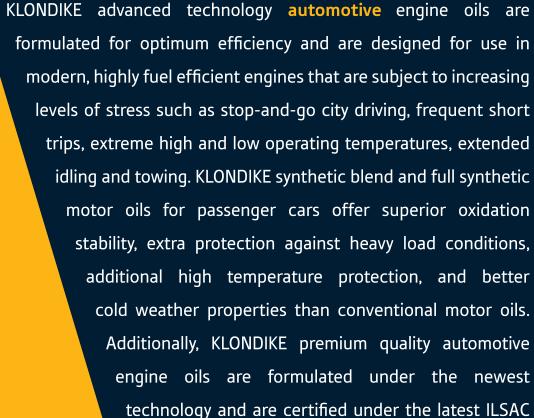

API SM specifications.



GF-5 and API SN specifications. This technology

is also good for use in the prior ILSAC GF-4 or

HYDRAULIC FLUIDS

INDUSTRIAL OILS

Automotive Engine Oils



Price:











KL-LD1480





KL-LD1482

SAE 10W-30 SN/GF-5 Synthetic Blend is recommended for use in automobiles and other stationary or mobile engines specifying SAE 10W-30 grade and API SN/GF-5 Service Category.



KL-LD1490





KL-LD1495

KL-LD1499

for use in stationary or mobile engines specifying SAE 0W-20 grade and API SN/GF-5.













KL-LD3099

SAE 0W-20 SN/GF-5 dexos1° Full Synthetic is certified for use in GM dexos1° and recommended

Price:

SAE 5W-20 SN/GF-5 dexos1° Full Synthetic is certified for use in GM dexos1° and recommended for use in stationary or mobile engines specifying SAE 5W-20 grade and API SN/GF-5.



KL-LD3240





KL-LD3260





KL-LD3282







KL-LD3290



KL-LD3295

KL-LD3299

Price:

SAE 5W-30 SN/GF-5 dexos1° Full Synthetic is certified for use in GM dexos1° and recommended for use in stationary or mobile engines specifying SAE 5W-30 grade and API SN/GF-5.











KL-LD3482





KL-LD3495



Price:

SAE 5W-40 SN/CF Euro Full Synthetic is recommended for use in modern European 4, 6 and 8+ cylinder multi-cam, multi-valve, naturally aspirated, super- and turbo-charged engines.















KL-LD5099





KL-LD3490




KL-LD5060

KL-LD5082 KL-LD5090



Automotive Engine Oils

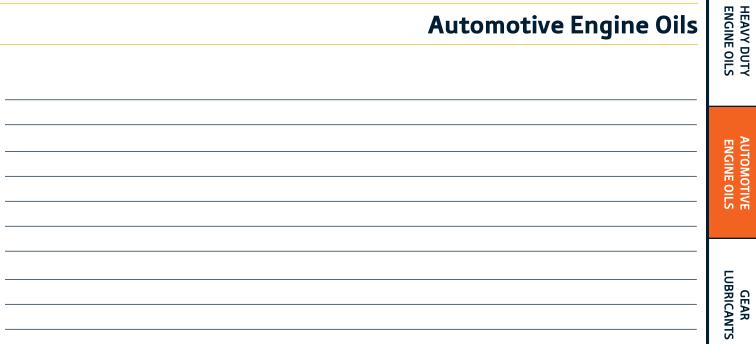

Gear Lubricants



= Conventional



= Synthetic Blend



= Full Synthetic









KL-GL1085

final drives specifying SAE 80W-90, and API GL-5/MT-1 including limited slip.



KL-GL1090

SAE 80W-90 GL-5 is designed for differentials, manual transmissions, power take off units, and



KL-GL1099



KL-GL1380 Price:



SAE 75W-90 GL-5 Full Synthetic is recommended for use in heavy duty gear applications specifying SAE 75W-90 and API GL-5/MT-1 including limited slip.









SAE 75W-140 GL-5 Full Synthetic is recommended for use in heavy duty gear applications



KL-GL2085 KL-GL2090 KL-GL2080

KL-GL2050

KL-GL2095



specifying SAE 75W-140 and API GL-5/MT-1 including limited slip.

Price:





KL-GL2480






Price:



KL-GL2485 KL-GL2490

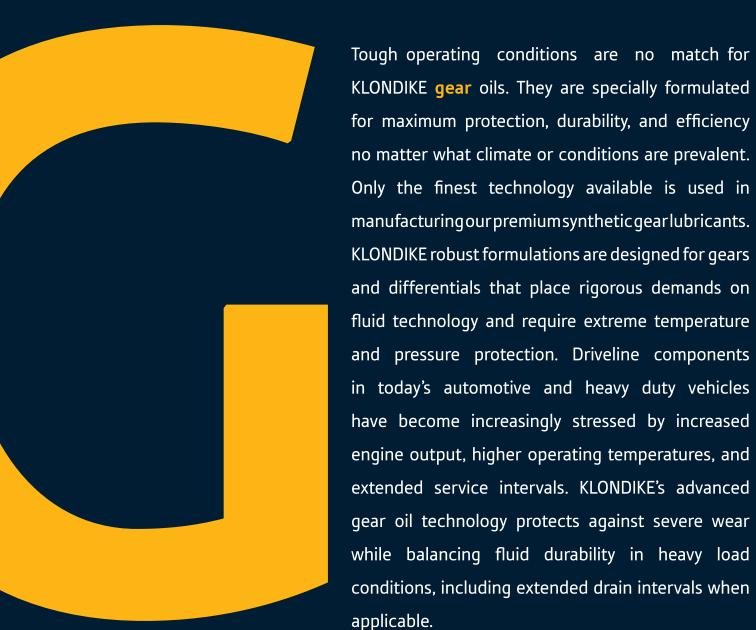

Price: SAE 85W-140 GL-5 is designed for differentials, manual transmissions, power take off units, and final drives specifying SAE 85W-140, and API GL-5/MT-1 including limited slip.

HYDRAULIC FLUIDS

INDUSTRIAL OILS

GREASES

HEAVY DUTY ENGINE OILS

AUTOMOTIVE ENGINE OILS

Gear Lubricants





KL-GL4080 KL-GL4090

drives of all sizes where ISO 150 is specified.

drives of all sizes where ISO 220 is specified.

Price:



KL-GL4280

KL-GL4290

Price:

ISO 320 EP is designed for heavily loaded plain bearings, enclosed gear drives, and reducers on drives of all sizes where ISO 320 is specified.

ISO 150 EP is designed for heavily loaded plain bearings, enclosed gear drives, and reducers on

ISO 220 EP is designed for heavily loaded plain bearings, enclosed gear drives, and reducers on





KL-GL4480 KL-GL4490

ISO 460 EP is designed for heavily loaded plain bearings, enclosed gear drives, and reducers on drives of all sizes where ISO 460 is specified.





KL-GL4680 KL-GL4690

Price:

ISO 150 EP Full Synthetic is formulated for industrial bearings and gear applications operating in very heavy duty and shock-loaded conditions where ISO 150 is specified.



KL-GL6080 KL-GL6090

Price:

Gear Lubricants

very heavy duty and shock-loaded conditions where ISO 220 is specified.



KL-GL6280

Price:

ISO 320 EP Full Synthetic is formulated for industrial bearings and gear applications operating in very heavy duty and shock-loaded conditions where ISO 320 is specified.

ISO 460 EP Full Synthetic is formulated for industrial bearings and gear applications operating in

ISO 220 EP Full Synthetic is formulated for industrial bearings and gear applications operating in







KL-GL6290

KL-GL6480



Price:




very heavy duty and shock-loaded conditions where ISO 460 is specified.



KL-GL6680 KL-GL6690

Transmission Fluids







= Full Synthetic



KLONDIKE transmission fluids are formulated

for use in a full range of automatic transmissions

and provide premium shifting characteristics.

This full range of automatic transmission fluids

offer smooth yet responsive shifting, long service

life, and outstanding fuel efficiency. KLONDIKE

transmission oils are engineered to provide

improved performance, extended transmission

life, as well as premium flow characteristics at very

low tempratures and protection against oxidation,

varnish and sludge at high temperatures.

Price:







KL-TF1090



Heavy Duty ATF Full Synthetic is formulated for high performance and long service life in heavy

CVT Fluid Full Synthetic is formulated for belt and chain driven continuously variable transmissions.









Approvals: DEXRON®-VI MERCON® LV













Price:



Do not use as a replacement for ATF.





HYDRAULIC FLUIDS

INDUSTRIAL OILS

HEAVY DUTY ENGINE OILS

AUTOMOTIVE ENGINE OILS

GEAR LUBRICANTS

Transmission Fluids

STIO

Transmission Fluids



ATF Universal Full Synthetic is one highly advanced and truly universal automatic transmission fluid ideal for global application. Meets the performance requirements of (but not limited to):

Aisin Warner – AW-1, JWS 3309, 3324, M313 A-1, T-IV

Acura - ATF-Z1

Allison - C-3, C-4, TES-295, TES-389

Audi - ZF 5HP (18FL, 19FL, 24A, 30), 6HP (1375.4), TL52162 (LT71141), G-052-025-A2, G-052-162-A1/A2, G-055-025

BMW - ZF 5HP (18FL, 19FL, 24A, 30), 6HP (1375.4), LA2634, ETL-7045E, ETL-8072B, N402, LT71141 83.22.9.400 (272, 275), 83.22.9.407 (738, 765, 807, 858, 859), 83.22.0.397 (114), 83.22.0.403 (248, 249)

Caterpillar – Power Shift TO-2

Chrysler - AS 68 RC ("T-IV)", ATF+3 (MS7176-E), ATF+4 (MS9602)

Daewoo - LT71141

Fiat - Type T-IV

Ford Mercon®

Mercon (XT-2-QDR,XT-2-QSM syn)

Mercon V (XT-5-QM, XT-5-DM, WSS-M2C-202B)

Mercon SP (XT-6-QSP, XT-6-DSP, WSS-M2C-919D)

Mercon LV (XT-10-QLV, WSS-M2C-938A)

WSS-M2C33-A/B/C/D/F/G, WSS-M2C138-CJ, WSS-M2C166-H, 185-A, 195-A, 202-B, WSS-M2C-922-A1, 924-A (XT-8-QAW)

GM Dexron®

Dexron VI, III-H, III-G, III-F, II-E, II-D, II, Type A, T-IV GM Transfer Fluid 12378515 (Transynd® applications)

GM Transfer Case 12378396, 12378508

Honda - ATF-Z1, VTM-4, DW-1

Hyundai/Kia – Red 1, SP-II, SP-III, SP-IV, NWS-9638

Infinity - Matic-D, Matic-J, Matic-K, Matic-S

IDEMITSU – K17, JATCO 3100 PL085

Isuzu Bescom - ATF-II, ATF-III,

Jaquar - ZF 5HP24, ZF 6HP26, LT71141, JLM20238, ÍLM21044, ATF 3403 M115, M1375.4

IASO - M315-2004 1A, 2A-02

Jeep - ATF+3, ATF+4, AS 68 RC (T-IV)

Lexus – Type T, T-II, T-III, T-IV, WS (JWS 3324)

MAN – 339,F, V1, V2, Z1, Z2, Z3

Mazda – ATF-M III, ATF-MV, V (XT-9-QMM5, FNR 5) MERCEDES - ZF 4HP20, 223.2, 236.1, 236.10, 236.11 236.12, 236.14, 236.41, 236.5(C-4), 236.6, 236.7, 236.8,

Mini Cooper - 83 22 0 402 413 9 (JWS 3309)

Mitsubishi – Diamond SP-II, SP III, SP IV, Dia Queen

NAG - 1 (Jeep Cherokee), 2 (Chrysler)

Nissan – Matic-D, Matic-J, Matic-K, Matic-S, 402

Porsche - ATF 3403 M115, LT71141, T IV (JWS 3309)

RENK – DOROMAT

SAAB -T-IV (JWS 3309), 93 165 146/147

SATURN - T-IV, (SEE GM LISTING)

Scion - "all vehicles"*

Shell - 3403, 3353, LA2634, ATF-134, M-1375.4, M-1375.5, M-1375.6,

Subaru - ATF, AT-HP

Suzuki - ATF 3309, 3314, 3317

Texaco - ETL-7045E, ETL-8072B, N402

Toyota – Type T, T-II, T-III, T-IV, WS (JWS 3324)

Vickers - M-2950-S, I-286-S

Voith Turbo - G607 (55.6335.XX), G1363 (55.66336.

XX), TURBO, ZF, ECOMAT

Volkswagen – ZF 5HP (18FL, 19FL, 24A, 30), 6HP (1375.4), TL 52162 (LT71141), TL 52533,G-052-025, G-055-025-A2, G-052-162-A1/A2, G-052-182-A2, G-052-990-A2

Volvo - 97340, 97341

ZF - TE-ML 02F, TE-ML 03D, TE-ML 04D, TE-ML 09, TE-ML 11A, TE-ML 14A, TE-ML 14B, TE-ML 14C, TE-ML 16L, TE-ML 17 C, 5 HP 18FL/19 FL/24A



KL-TF3040







KL-TF3082





KL-TF3090



KL-TF3095



Price:



SAE 50 Manual Transmission Full Synthetic is recommended for use in all applications specifying SAE grade 50 and API Service Category MT-1.











KL-TF4080 KL-TF4085



Price:



KL-TF4090







KL-TF6090

KL-TF6095

KL-TF6099

SAE 30 TDTO-4 Transmission and Drivetrain Fluid is designed for heavy duty mobile and stationary equipment where Caterpillar TO-4 or Allison C-4 fluids for SAE 30 grade are specified.

All Season Synthetic Blend TDTO-4 is for all season use across a wide To range in heavy duty

SAE 10W TDTO-4 Transmission and Drivetrain Fluid is designed for heavy duty mobile and

stationary equipment where Caterpillar TO-4 or Allison C-4 fluids for SAE 10W grade are specified.



Price:









KL-TF6280

KL-TF6295

KL-TF629

SAE 50 TDTO-4 Transmission and Drivetrain Fluid is designed for heavy duty mobile and stationary equipment where Caterpillar TO-4 or Allison C-4 fluids for SAE 50 grade are specified.











KL-TF6490

KL-TF6495 KL-TF6499

Price:













Price:







KL-TF7495

KL-TF7499

Price:





18

Hydraulic Fluids



= Conventional





= Full Synthetic



KLONDIKE anti-wear hydraulic fluids are

designed to operate in the most extreme

conditions. Today, operating conditions require

greater precision and pressure than ever before.

While advanced systems do more work and are

more responsive, they are also more vulnerable

to wear and deposit formation when operated at

higher temperatures and pressures. Highly tested

KLONDIKE hydraulic lubricants are specially

formulated with the finest base oils and additive

systems that deliver unrivaled performance and

protection.







duty and industrial service where AW 22 viscosity is specified.

KL-HF1090

KL-HF1095

KL-HF1099

Price:













KL-HF1299

AW 22 Hydraulic Fluid is recommended for vane, piston, or gear-type hydraulic pumps in heavy

Price:



duty and industrial service where AW 46 viscosity is specified.

Price:









AW 46 Hydraulic Fluid is recommended for vane, piston, or gear-type hydraulic pumps in heavy

KL-HF1460 KL-HF1480

KL-HF1490 KL-HF1495



AW 68 Hydraulic Fluid is recommended for vane, piston, or gear-type hydraulic pumps in heavy duty and industrial service where AW 68 viscosity is specified.





KL-HF1680 KL-HF1690

KL-HF1695



HYDRAULIC FLUIDS

INDUSTRIAL OILS

GREASES

HEAVY DUTY ENGINE OILS

AUTOMOTIVE ENGINE OILS

GEAR LUBRICANTS

Hydraulic Fluids



AW 100 Hydraulic Fluid is recommended for vane, piston, or gear-type hydraulic pumps in heavy duty and industrial service where AW 100 viscosity is specified.





KL-HF1880 KL-HF1890



Price:

MAX[™] Long Life AW 22 is an anti-wear hydraulic fluid recommended for vane, piston, or gear-type hydraulic pumps in heavy duty and industrial service where AW 22 viscosity is specified.









KL-HF3080

KL-HF3090

KL-HF3099

Price:

MAX[™] Long Life AW 32 is an anti-wear hydraulic fluid recommended for vane, piston, or gear-type hydraulic pumps in heavy duty and industrial service where AW 32 viscosity is specified.







KL-HF3280

32

Price:

KL-HF3290

MAX™ Long Life AW 46 is an anti-wear hydraulic fluid recommended for vane, piston, or gear-type hydraulic pumps in heavy duty and industrial service where AW 46 viscosity is specified.



46





KL-HF3490



KL-HF3480

MAX[™] Long Life AW 68 is an anti-wear hydraulic fluid recommended for vane, piston, or gear-type hydraulic pumps in heavy duty and industrial service where AW 68 viscosity is specified.



KL-HF3680







KL-HF3690





Price:



46 FREE





KL-HF5890

KL-HF5880

KL-HF5895

Price:

Multi-Viscosity AW 15 with Arctic Performance Technology is formulated for high performance hydraulic systems in mobile and stationary equipment operating in ultra-low temperatures.

61

Price:





KL-HF4890

KL-HF4895

KL-HF4880







KL-HF5080

KL-HF5090

KL-HF5095

Price:

Multi-Viscosity AW 36 with Arctic Performance Technology is formulated for high performance hydraulic systems in mobile and stationary equipment across a broad temperature range. 36

Price:





KL-HF5280

KL-HF5290



Zinc Free AW 46 is an ashless hydraulic fluid with very low acute aquatic toxicity, does not contain

Multi-Viscosity AW 22 with Arctic Performance Technology is formulated for high performance

metal based performance additives, and is classified as inherently biodegradable.





46 Price:

KL-HF5480 KL-HF5490

INDUSTRIAL OILS

GREASES

HEAVY DUTY ENGINE OILS

AUTOMOTIVE ENGINE OILS

GEAR LUBRICANTS

TRANSMISSION FLUIDS

Hydraulic Fluids



BIO AW 32 is a readily biodegradable, non-toxic, ashless fluid designed for high performance hydraulic systems in mobile and stationary equipment where AW 32 viscosity is required.

BIO AW 46 is a readily biodegradable, non-toxic, ashless fluid designed for high performance



KL-HF6280 KL-HF6290

hydraulic systems in mobile and stationary equipment where AW 46 viscosity is required.

KL-HF6480 KL-HF6490

46 Price:

Long Life Turbine Oil ISO 46 is designed for use in non-geared steam, hydro-electric and gas turbines as well as a high temperature bearing lubricant and coolant.



46



Price:

Long Life Turbine Oil ISO 68 is designed for use in non-geared steam, hydro-electric and gas turbines as well as a high temperature bearing lubricant and coolant.



KL-HF7080



Price:

Universal Tractor Fluid is the one single fluid that may be used to lubricate all conventional points on an agricultural or industrial tractor or piece of mobile equipment with a common sump.











KL-HF8080 KL-HF8090




KL-HF8095

Price:

Hydraulic Fluids





Price:





KL-HF8280 KL-HF8290

Universal Tractor Fluid Full Synthetic is formulated with Arctic Performance Technology for use

Industrial Oils







= Full Synthetic



The KLONDIKE family of industrial and functional fluids is formulated for

exceptional performance and reliability using world-class technologies that

have been trusted and proven by industry professionals for many years and

is relied on by industry users all year round. Our bar and chain oil is of the

highest quality and operates in extreme climatic - high or low temperature -

conditions. It offers unsurpassed durability and performance for equipment

operating in high heat conditions, and performs flawlessly in the logging and

the saw mill industries that require the most robust and durable lubricant

formulations in order to maximize efficiency and productivity.









Light Hi-Tack Bar & Chain Oil is a low viscosity formula for winter use in all types of chain saws

Price:







KL-I01280



KL-I01290













KL-IO1495





ROCKDRILL

Price:

Rock Drill Oil ISO 32 is formulated for the internal mechanisms and moving parts of pneumatic drilling equipment operating in heavy duty service environments where ISO 32 is specified.



HYDRAULIC FLUIDS

HEAVY DUTY ENGINE OILS

AUTOMOTIVE ENGINE OILS

GEAR LUBRICANTS

Industrial Oils

Industrial Oils









KL-103090

Price:

KL-103080

ISO 260 Natural Gas Compressor Oil is specifically designed for the lubrication of large, heavy duty pipeline compressors pumping hydrocarbons such as natural gas.

Rock Drill Oil ISO 150 is formulated for the internal mechanisms and moving parts of pneumatic

drilling equipment operating in heavy duty service environments where ISO 150 is specified.







KL-104490 KL-104495



2-Cycle TC-W3 is a NMMA certified ashless engine oil formulated for use in pre-mix and mix-ondemand VRO oil delivery system applications requiring oils meeting API TC.





5 QUART KL-106040 KL-106060

machine tools such as lathes, planers, shapers, and tapping machines.





Price:

KL-107280 KL-107290



Soluble Cutting Oil is a water-soluble cutting fluid designed for long service life and low maintenance; and suitable for use on a wide range of materials and machining operations.

ISO 68 Way Oil is specifically formulated for use in the lubrication of bearings, slides, and ways of



Price:







KL-109990 KL-109995



KLONDIKE produces a range of unique robust and tacky greases that provide premium lubrication in difficult operating conditions and are tailored to industry requirements for improved productivity. They are specially engineered for environments with extreme temperature requirement, moisture and dirt contamination, heavy loads, extended maintenance intervals and other conditions that impact performance. Our greases are created with the finest base oils and additives in order to provide outstanding tackiness, lubrication and protection. These formulations will guard against oxidation and wear in extreme pressure and high temperature applications.

Greases







= Full Synthetic



MULTI-PURPOSE








KL-GR0485

Ultra Tac EP-0 Synthetic Blend is designed for heavy duty use in industrial, on- and off-road

Ultra Tac EP-1 Synthetic Blend is designed for heavy duty use in industrial, on- and off-road

KL-GR0490




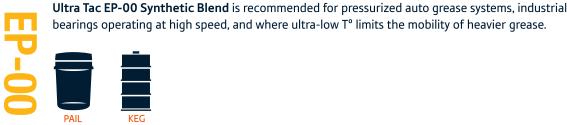




Price:








Price:







KL-GR1480

HEAVY DUTY ENGINE OILS

AUTOMOTIVE ENGINE OILS

GEAR LUBRICANTS

HYDRAULIC FLUIDS

INDUSTRIAL OILS

Greases Greases Ultra Tac EP-2 is designed for extreme duty use in a wide variety of industrial, on- and off-road vehicle, and heavy equipment applications where NLGI 2 is specified. KL-GR1830 Price: Moly Tac EP-1 is formulated with 3% molybdenum disulfide for use in heavy duty, shock loaded bearings and bushings in industrial or off-highway equipment where NLGI 1 is required. KL-GR2430 Price: Moly Tac EP-2 is formulated with 3% molybdenum disulfide for use in heavy duty, shock loaded bearings and bushings in industrial or off-highway equipment where NLGI 2 is required. KL-GR2880 KL-GR2885 KL-GR2890 KL-GR2830 Price:



Open Gear Lubricant is engineered to protect extremely heavy loaded, slow moving, large open gear sets operating in severely challenging environments.







KL-GR9080 KL-GR9085

Chemicals

The KLONDIKE product category of chemicals is dynamically striving to meet the ever-changing needs of our customers. KLONDIKE -40° Windshield Washer Fluid is created for the harsh Canadian winter climate and the toughest driving conditions requiring formulations that go above and beyond the typical blue color fluid formulas. It protects against freezing down to -40°C. KLONDIKE Industrial Solvent is a premium low flashpoint solvent for general purpose cleaning. It effectively removes grease, lubricating oils, metal working fluids, and fine particles from metal surfaces. KLONDIKE Brake Blast is an advanced blend with low odor, designed to quickly dry and instantly

degrease. The superior cleaning and degreasing power

of this professional formula works fast on the toughest

grime.

WASH Price:

-40°C Washer Fluid is a special de-icing formulation for the Canadian winter climate which cuts through frost and ice buildup on the windshield and wiper blades to maintain maximum visibility.





KL-CH5450

KL-CH5490

Solvent is a general purpose solvent for industrial use and is recommended for parts washer machines or application by hand or by hand held sprayer.



KL-CH8280





Price:

Brake Blast is a non-chlorinated solvent designed to remove contaminants from brake parts quickly and easily. Surfaces dry residue free for improved, smooth brake performance.



KL-CH8630

KL-CH8680

KLONDIKE Lubricants Corporation Warranty

KLONDIKE Lubricants Corporation warrants that at the time of sale, all lubricant, grease, and engine coolant products bearing the KLONDIKE brand meet their written product specifications and are free of defective materials, design, and workmanship.

The KLONDIKE warranty is in addition to, and does not invalidate, any warranty supplied by an original equipment manufacturer when used in accordance with the KLONDIKE written product recommendations and the original equipment manufacturers' written specifications*.

KLONDIKE is 100% committed to our customers. To support this commitment, KLONDIKE Lubricants Corporation will repair or replace equipment parts that have been damaged as a direct result of the failure of any of our products*.

*For specific warranty details and procedures, contact KLONDIKE Lubricants Corporation at info@klondikelubricants.com.

KLONDIKE Cross-Reference Table

KLONDIKE ®	Shell	Chevron	Petro Canada	Esso/Mobil	Conoco-Phillips	Castrol
AW Hydraulic Fluid	TELLUS S2	HYDRAULIC OIL AW	N/A	HYDRESSTIC NUTO	HYDRAULIC AW	HYSPIN AWS
MAX Long Life Hydraulic Fluid	TELLUS S2 MX	RANDO HD	HYDREX AW	N/A	MEGAFLOW AW	PARADENE AW
Multi-Viscosity Hydraulic Fluid	TELLUS S2 V	RANDO HDX	HYDREX MV and MV ARCTIC	UNIVIS N-C	MEGAFLOW AW HVI	DUAL RANGE HV
15W-40 CJ-4 Engine Oil	ROTELLA T TRIPLE PROTECTION	DELO 400 LE	DURON-E	DELVAC 1300 SUPER, DELVAC ELITE	FLEET SUPREME EC, GUARDOL ECT	TECTION EXTRA
OW-30/OW-40/5W-40 CJ-4 Full Synthetic Oil	ROTELLA T6	DELO 400 SYNTHETIC LE (SAE 5W-40 only)	DURON-E SYNTHETIC	DELVAC 1 ESP	TRITON ECT FULL SYNTHETIC (SAE 5W-40 only)	ELIXION (SAE 5W-30 only)
80W-90 GL-5 Gear Oil	SPIRAX S2 A	DELO ESI/RPM Universal Gear	TRAXON	MOBILUBE HD PLUS	MP GEAR LUBE	AP GEAR, HYPOY C
75W-90/75W-140 Synthetic Gear Oils	SPIRAX S6 AXME	DELO SYN- GEAR HD, XDM	TRAXON-E SYNTHETIC	DELVAC SYN GEAR	TRITON SYNLUBE LDO, SYNGEAR SS, FE	SYNTEC FULL SYNTHETIC
Universal Tractor Fluid	SPIRAX S4 TXM	1000 THF	DURATRAN	MOBIL HYDRAUL	HYDRAULIC/ TRACTOR FLUID	UNIVERSAL TRACTOR FLUID
EP-0, EP-1 & EP-2 Grease	GADUS S3 V220C	DELO HD EP, DELO ESI, MULTIFAK, STARPLEX	PRECISION/ VULTREX	DELVAC XTREME, EPIC 102, MOBILUX, RONEX, UNIREX	DYNALIFE HT, DYNALIFE L-EP, MILUBE WR, MULTIPLEX RED, RED TAC, SUPER- STA, UNOBA EP	MP GREASE, PYROPLEX GOLD, PYROPLEX RED
Bar & Chain Oil ISO 90/150/220	CHAIN OIL	RED CHAIN BAR OIL	DURATAC	MOBIL HD CHAIN OIL	SPECIAL BAR & CHAIN	N/A



Industry Applications

AGRICULTURE

KLONDIKE agriculture fluids are formulated to ensure maximum productivity in a critically time sensitive seasonal industry. Proper lubrication goes beyond protection, and our lubricants are created with premium base oils and inhibitors to disperse soot and reduce sludge. Formulated with Million Mile Technology, the KLONDIKE engine oils provide durability and reliability, and consistent performance during the long, demanding hours of the harvest season.



AUTOMOTIVE

The KLONDIKE product lines of automotive engine oils and automatic transmission fluids employ advanced formulations to meet and exceed the world's leading automakers requirements. Our cutting-edge synthetic blend and full synthetic formulas are engineered to provide maximum protection and optimum performance in all driving conditions. Certified by GM's dexos1°, GM's DEXRON°-VI, Ford's MERCON° LV.



CONSTRUCTION & EXPLORATION

Understanding the rigorous challenges and the nohassle requirements placed on construction and exploration equipment, KLONDIKE has engineered robust lubricants for environments with moisture and dirt contamination, heavy loads, extended maintenance intervals and other harsh conditions. The KLONDIKE Arctic Performance Technology line ensures maximum protection with smooth and reliable performance in extreme cold weather conditions.



FORESTRY

With relentless work schedules, environmental challenges, competitive pricing and harsh climatic conditions faced by the forestry industry, we are continually enhancing the KLONDIKE range of oils and lubricants to ensure harvesting, transportation and wood-production is as efficient and cost effective as possible. Our line of tough greases is blended for maximum lubrication and adhesion with minimum flyoff, making them ideal for milling operations.

Industry Applications



INDUSTRIAL

KLONDIKE has a vast range of premium industrial lubricants from conventional hydraulic fluids thru to premium environmentally friendly oils. We provide solutions that increase uptime, productivity, and efficiency. The KLONDIKE lubricants can be utilized to extend maintenance intervals and prolong the life of your equipment. Our technical professionals will identify your needs and provide solutions for faster production and greater cost efficiency.



MARINE

The KLONDIKE range of high quality marine oils is tailored for reliability, stringent safety standards and strict environmental requirements as specified by marine authorities. Engineered for durability and maximum protection, whether it is salt or fresh water, these hardworking lubricants will ensure that your marine vessels or pleasure craft run smoothly and efficiently. Certified by the National Marine Manufacturers Association - NMMA®.



MINING

We offer a complete selection of oils and lubricants tailored to the requirements of all types of mining operations from equipment to process lubrication. The KLONDIKE line of heavy duty engine oils will deliver optimum efficiency and performance to every application and specification found in the wide range of machinery used in mining. From surface to underground mining our oils and greases are formulated to deliver outstanding equipment protection.



ON-ROAD HEAVY DUTY

Our heavy duty engine oils are formulated to protect your investment in your equipment and maximize the life of your engine. KLONDIKE heavy duty engine oils provide high performance in extreme temperatures, heavy-load requirements and challenging terrain. They are designed to meet the difficult challenge of effectively balancing durability, extended drain intervals, and emission control. Certified by Cummins, Detroit Diesel, Volvo, Mack, and Renault.



Industrial & Safety Supplies

#45, 4216 - 54th Avenue SE, Calgary AB T2C 2E3

Phone: (403) 723-0241

orders@hardwareunlimited.ca

www.hardwareunlimited.ca

Authorized distributor for Klondike Lubricants



BRAVING THE FORCE OF MOVEMENT®